


5

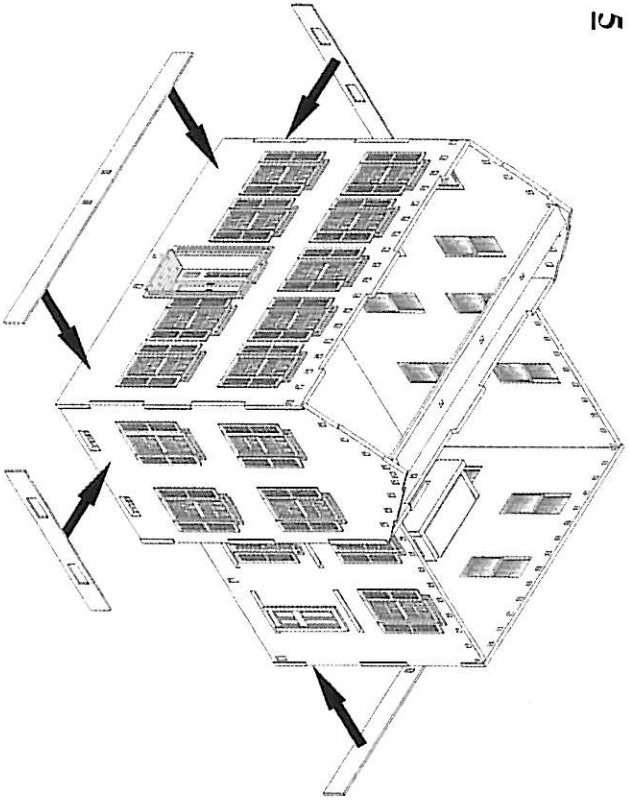

**Foundations:**

5) We have supplied peel and stick stone sheet to represent the stone foundation on the front, sides and rear of the house (see diagram). Each piece is cut to fit the appropriate side of the house so be sure to double check the location before sticking the stone into place.

The porches will get different foundation trim applied later.

**Side porch:**


6A) Start by assembling the two sets of lattice work by removing the peel-and-stick backing from one of the lattice pieces and pressing it over the other. These parts are fragile so remove the backing carefully.

Now glue the three lower porch supports into the slots in the side of the house. The front section can then be glued to them. The porch flooring will glue to the tops of the supports and into the slots in the side wall as shown.

Next, apply the front and side trim pieces. The lattice work assemblies are pressed onto the backs of these trim piece.

6B) Now assemble the larger lattice piece by applying one section of lattice over the other as before. This lattice piece should then be glued into place on the inside of the right end of the porch railing as shown. Now glue the side and front railings into the holes in the flooring and in the side wall of the house. The porch roof can now be glued into the slots in the side wall and onto top of the posts to complete the porch.

6A

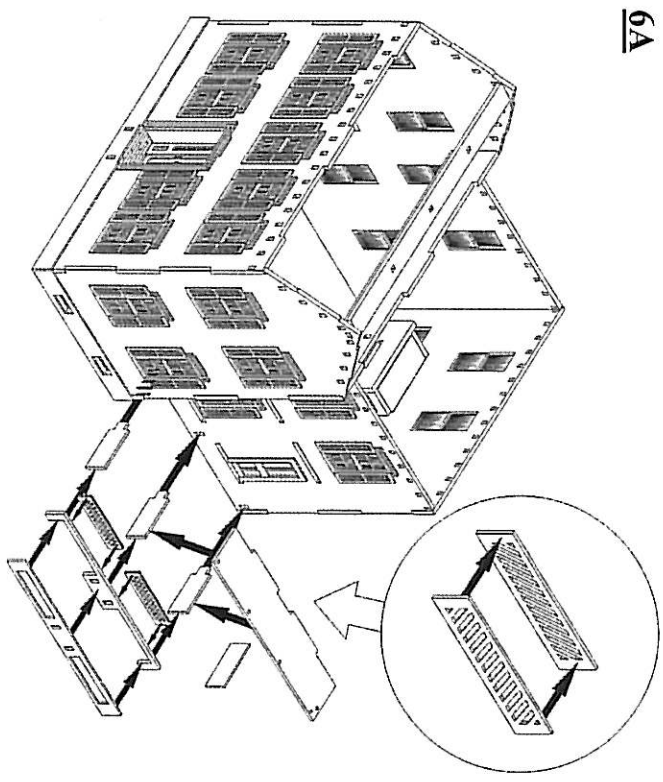

6B

