

5B

5B) Now add the roof trim pieces by removing the backing from them and pressing them onto the ends of the sub roof panels.

Porches and steps:

6A) Note that the slots for the front porch steps are in the front porch support wall but in the side support wall for the rear porch. Make sure that you have the correct parts for each location.

Glue the two side support walls for each porch into the slots in the foundation as shown. Now add the front support wall.


6B) Add the three sections of foundation stone to each porch. Next, glue the porch flooring into the slots in the front and rear walls and onto the top of the support walls.

You can now paint the stone foundation with your choice of gray or brown paint. For added detail spend a few minutes to pick out some of the individual stones with lighter and darker shades of your base color. Once this is dry follow with a wash of light gray or black to represent the mortar between the stones (Light gray will make the foundation appear newer, black older). Finally dry brush some light gray or tan highlights onto the stones.


6C) Add the porch roof supports by gluing them into the porch flooring as well as into the tabs in the front and rear walls.

Glue the two porch sub roof panels onto the supports as shown.


6E) Install the porch steps by first gluing the two stringers into the slots in the porch support walls. Once these are in place you can add the step treads by removing the backing and pressing them into place.

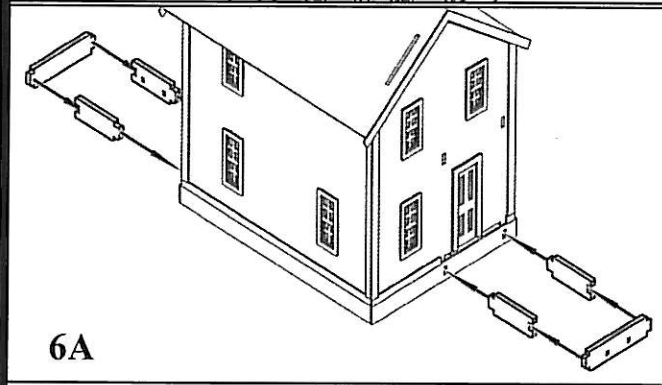


6A

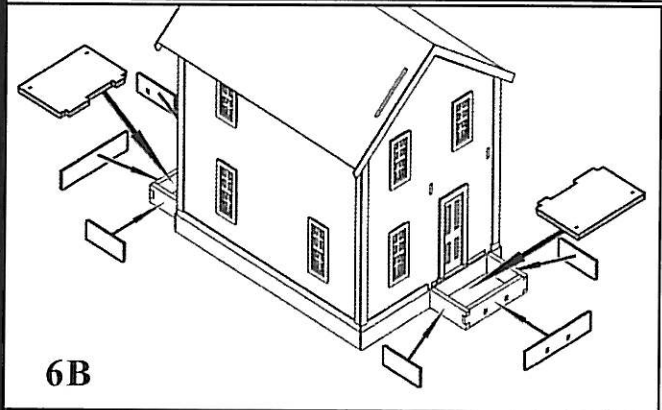

6B

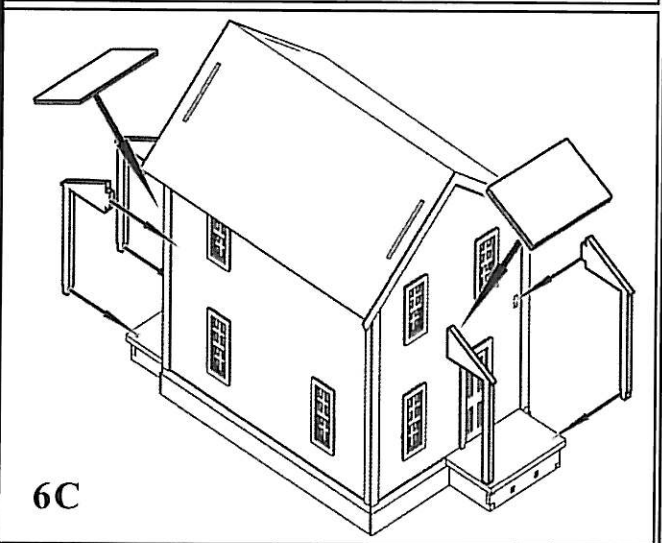

6C

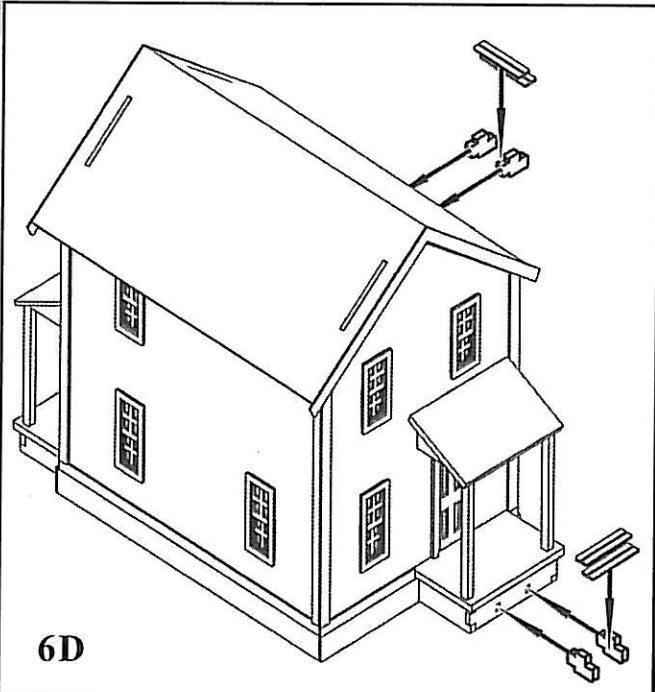

6D