


2B) The door is then applied to the inside of the front wall and the peel-and-stick door trim is applied to the outer portion of the house and will hold the door into place.

Decorative trim:

3) Removing the peel-and-stick backing from each piece, you can add the tiled shingles as well as the trim piece to the front of the house. The upper window can be placed as well. Once in place, you can add the two side trim pieces in the same manner. These should all line up with the peaks of the rooflines.

Front and rear porch construction:

4) Using white glue, install the lower porch flooring pieces into the tabs in the front and rear of the house. The front porch will also have an upper roof section that tabs into place as well. Both front and rear areas have two pieces of porch railing which will glue into the holes provided in the bases of each porch. Glue them into place and set aside to dry.

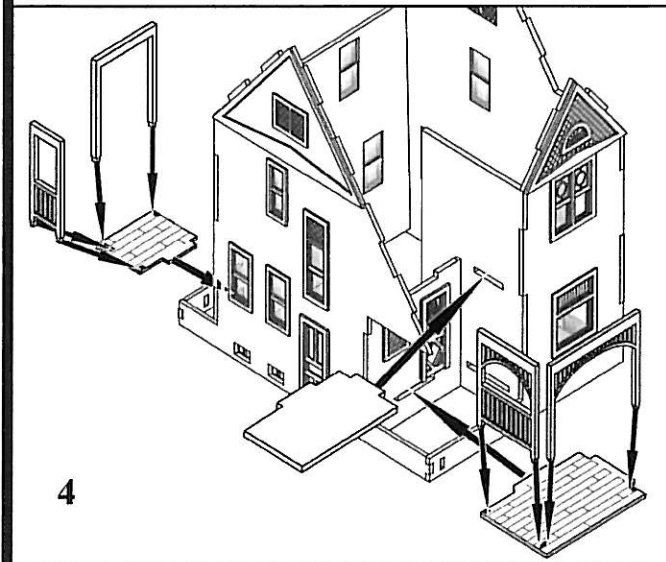

Roofing and upper dormer :

5A) Locate the front and rear sub roof pieces and glue them into place by locating them to the tabs on the tops of each wall. Front sub roof piece should overlap the rear to give your rooftop a nice clean edge.

5B) You can now assemble the upper roof dormer. Glue in the two side pieces followed by adding the front section. Once in place you can then add the upper trim pieces as well as the dormer window. These will attach by removing the peel-and-stick backing from each piece.

