


1

Constructing the shell:


1) Start the construction of the main shed walls by gluing the front wall assembly to the side walls. You will see that each wall assembly has precut notches in them, these line up with it proper adjoining wall. Follow by gluing the rear wall into place. Check that all of the corners are square and set aside to dry. Once dry, paint the wall assembly before applying the rest of the parts.

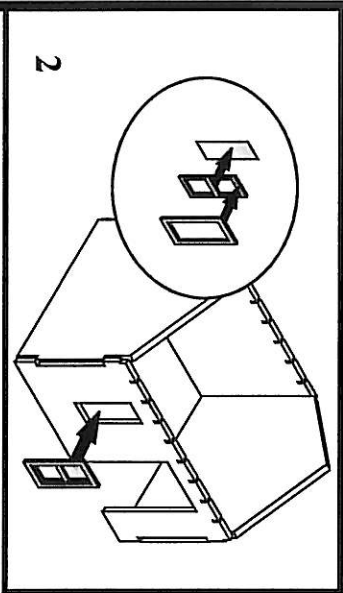

2

Windows:

2) To assemble the window, remove the backing from the inner sash and apply a section of clear window glazing to it. Now take the window frame and remove the peel-and-stick from it. Center the window sash into the frame and press into place, then place the completed window into the opening in the garage wall. The peel-and-stick on the frame will be more than enough to hold them into place.

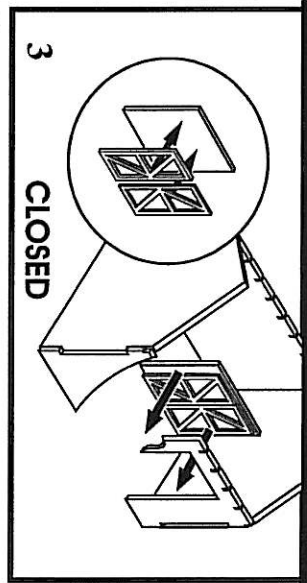


3

CLOSED


Doors:

3) The door can be displayed in one of two positions- open, or closed. If you choose to have the door closed use the full inner door panel on the door closed. This piece will be the backing for both doors. Center it behind the door opening and glue into place as shown. Now remove the outer doors from the trim sheet and remove the peel-and-stick backing from them. Line up and stick the outer door pieces to the inner door panel. Finally, attach the clear window pieces to the inside of the window opening.

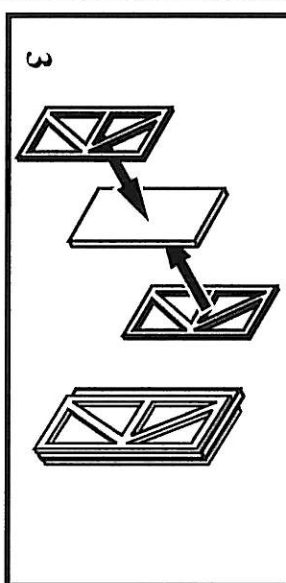

3


To model open doors use the two single inner door panels. Test fit the trim panel, you will notice the inner door parts are slightly longer than needed. This extra area will allow you to glue the doors to the inner frame of the garage opening. Attach the outer door trim to each individually keeping the trim flush to the inner door edge (see diagram). For the open doors there is an additional inner trim panel to attach to each door. Apply this to the inside of each door. Now set the completed door assemblies aside until you have installed the trim.

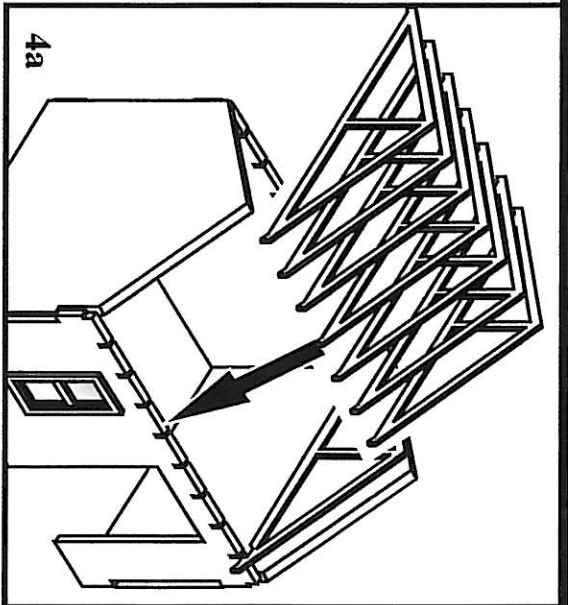

4a

Sub-roof, rafters, and inner framing:

4a) The 8 sections of roof rafters are installed next. Each rafter fits into the slots located on each side of the garages side walls. Gently press each in place and secure with a dab of white glue.

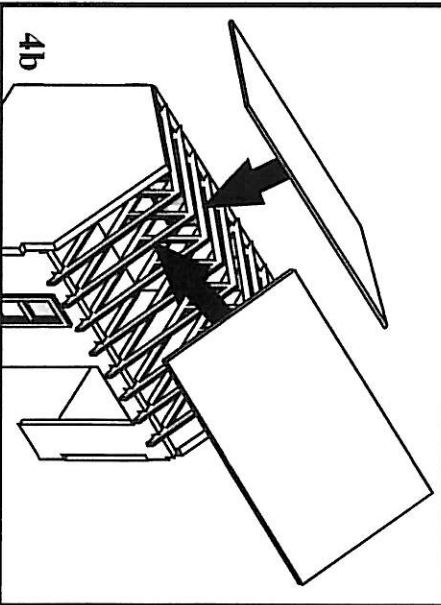

4b

4b) Once the rafters are in place you can add the roof panels as shown. The roof panels have peel-and-stick backing and attach directly to the roof rafters and the top edges of the front and rear walls.