

LASER-ART STRUCTURES by BRANCHLINE TRAINS

Constructing the shell:

- 1A) Glue the front wall assembly to the side wall sections as shown. Now glue the rear wall into place. Check that all of the corners are square and set aside to dry.
- 1B) Glue in the two walls for the small addition into the main structure, then glue the end wall into place. Square the assembly up and set aside to dry.
- 1C) Glue the four tower walls together as shown.
- 1D) Glue the tower into place onto the church as shown. Once dry, paint the walls before you apply the rest of the parts. Remember to paint both sides to prevent warping.


Windows & Doors:

- 2) To assemble the windows, first remove the peel-and-stick from the lower sash and apply a section of clear window glazing to it. Now do the same with the upper sash and frame making sure to keep the edge of the glazing flush with the top edge of the frame. Now stick the lower sash into place on the frame. Note that it is possible to position the lower sash in an open position if desired. Now take the window frame and remove the peel-and-stick from it. Center the window sash assembly into the frame and press into place.


The large front and rear windows and the basement windows do not have an inner sash. Assemble these by removing the backing from the window frame and pressing the clear glazing directly onto it. Note that the frame for the large windows includes a large section of trim, apply these carefully.

It is best to place the window assemblies into their openings as they are done. See the diagram for placement. The peel-and-stick on the frame will be enough to hold them into place.


To construct the doors remove the backing from the outer door trim panel and apply it to the backing panel as shown. Mount the outer frame section to the door, then insert the completed door into the wall opening.

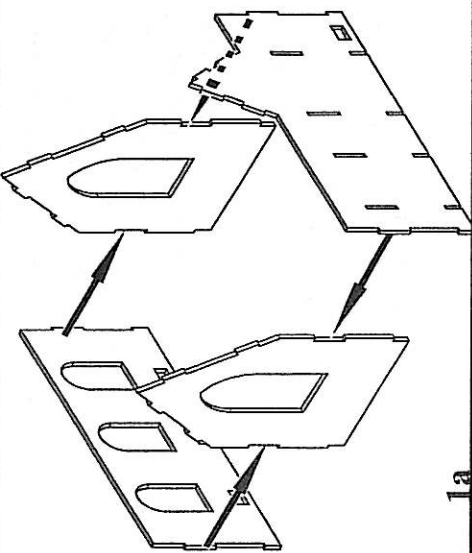


1a

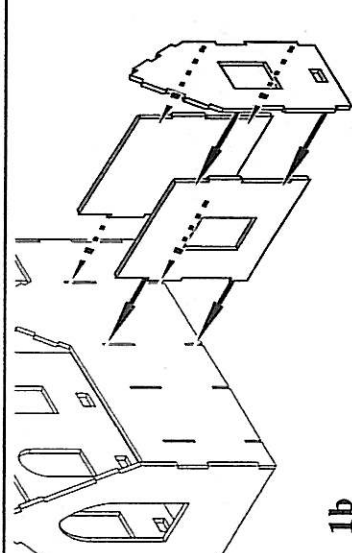


1b

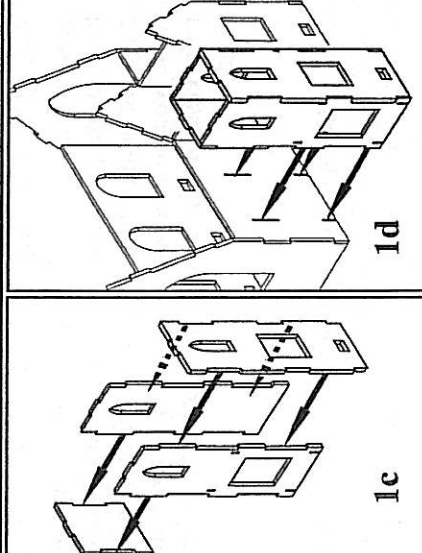


1c

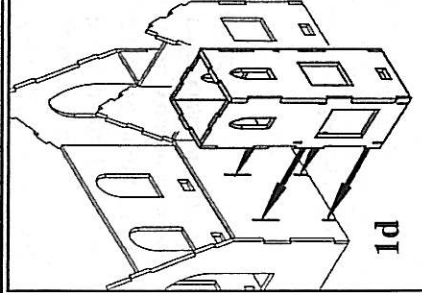

1d

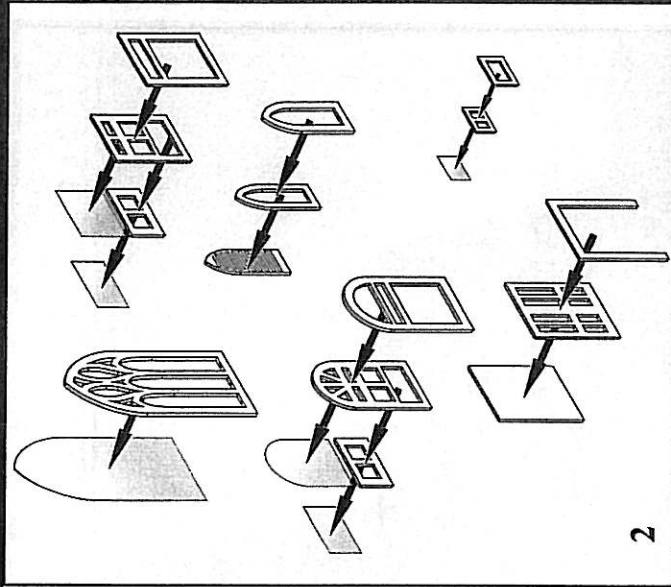

2

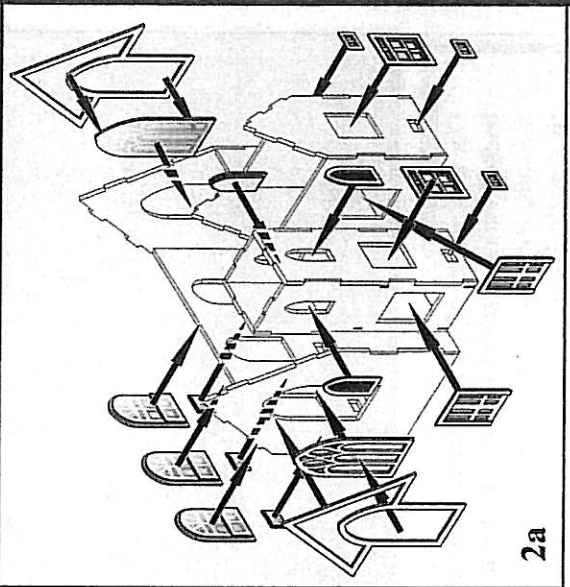

2a