



1

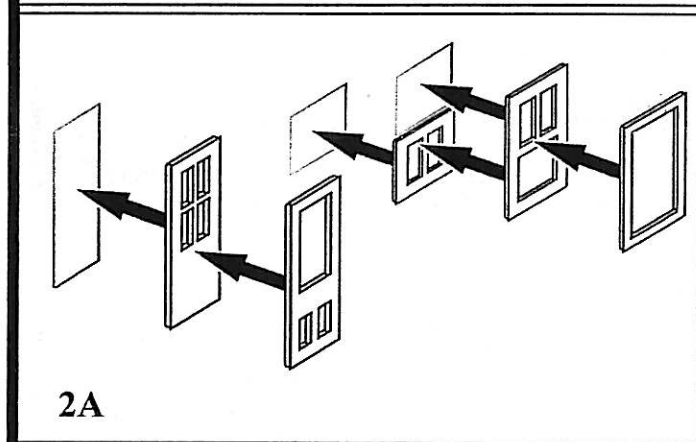

2A

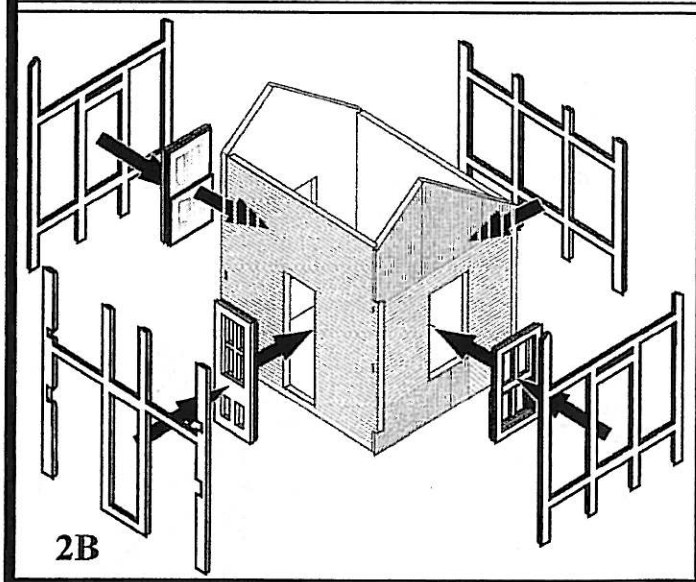

2B

Constructing the shell:

1) Start by gluing the front wall to the two side walls, then glue the rear wall into place. Check that all of the corners are square and set aside to dry. Once the glue has dried, paint the wall assembly before you apply the rest of the parts.

Windows:

2A) We strongly recommend pre-painting all of the window components before assembly.

To assemble the windows, first remove the peel-and-stick from the lower sash and apply a section of clear window glazing to it. Now do the same with the upper sash and frame making sure to keep the edge of the glazing flush with the top edge of the frame. Now stick the lower sash into place on the frame. Note that it is possible to position the lower sash in an open position if desired. Now take the window frame and remove the peel-and-stick from it. Center the window sash assembly into the frame and press into place. Refer to the diagram to determine how each window is assembled.

The windows and frames will be held in place with the outer wall trim, so once your windows are assembled set them aside until the next step.

The door is built up from layers. The prototype's door had lighter colored inner panels with darker colored trim. If you want to match this, paint the two door panels first before assembling the door.

To assemble the door, first remove the backing from the outer door trim panel and apply it to the backing panel as shown. Mount the outer frame section to the door, then insert the completed door into the wall opening.

Like the windows, the door is held in place by the trim. Set the completed door aside until the next step.

Trim:

2B) Apply the one piece peel-and-stick trim to the sides of the structure first. Place the trim on the siding flush with the edges of the walls and the upper roof. Now insert the window assemblies from the inside of the structure and press them into their openings.

Now apply the front trim piece. This trim piece overlaps the two side trim pieces to form a tight corner. Once the front trim piece is applied, press the door into place from the inside. Finally, install the rear trim piece, overlapping the side trim pieces to form a tight corner.