

1a


**Constructing the inner walls:**

1A) Start construction of the inner walls by gluing the five wall sections together as shown. Make sure that the removable backing on the outer walls is facing out, not in. Make sure the walls are square and set aside to dry.

1B) Glue the flooring into place with the slot in the floor towards the front of the building as shown.

**Track levers and lower base:**

2) The plastic sheet with the track levers on it will mount into the slot in the flooring. Prior to mounting, bend the levers alternately back and forth in a random pattern (see diagram). The levers should be painted black, with the ends can be picked out in red.

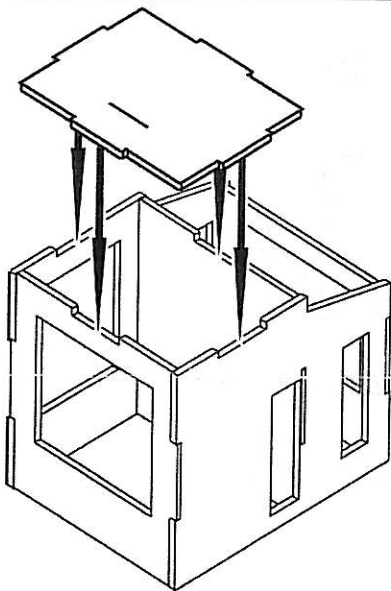


2

The lower foundation sections are applied by first removing the peel-and-stick backing from the walls then applying the foundation section onto it flush with the bottom edge. Start with the two larger side walls followed by the others. The front and rear sections will overlap the sides to give you a clean corner.



**Outer wall assembly:**

3) Press the five outer wall panels and the outer walls sides of the inner walls with the backing on them. Start with the front wall, then add the side walls. The upper rear wall will glue into the tabs on the side walls as shown.

At this point paint the walls if you haven't done so already.

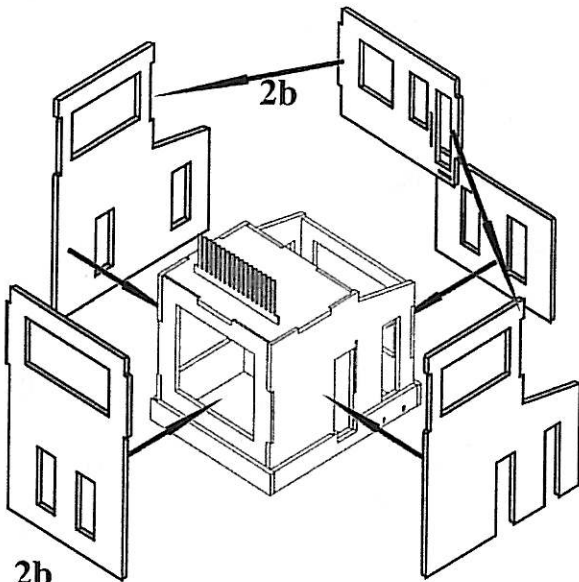

2b

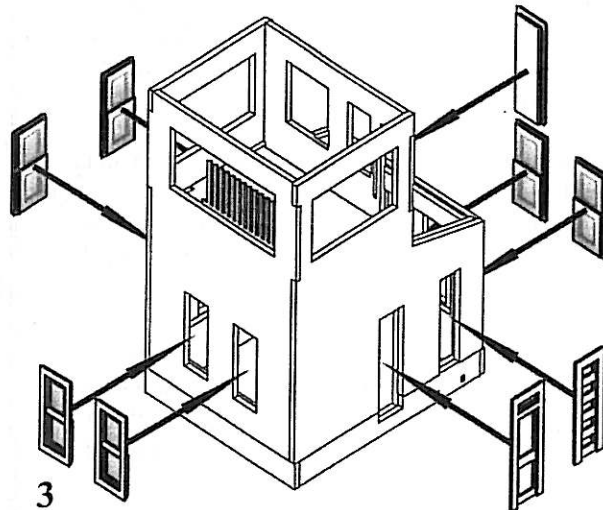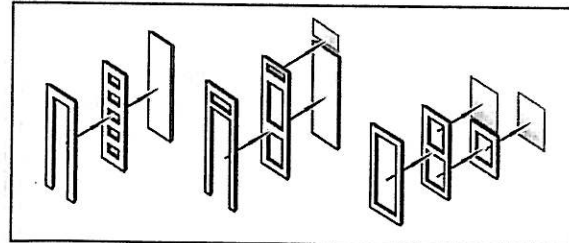

3