



1a

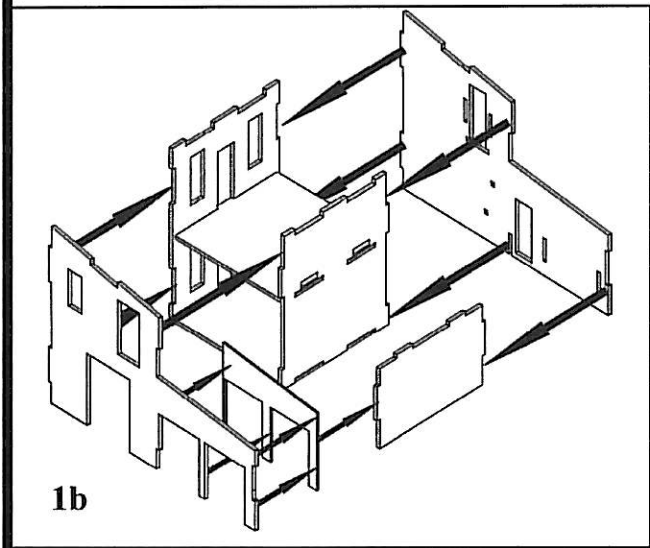

1b

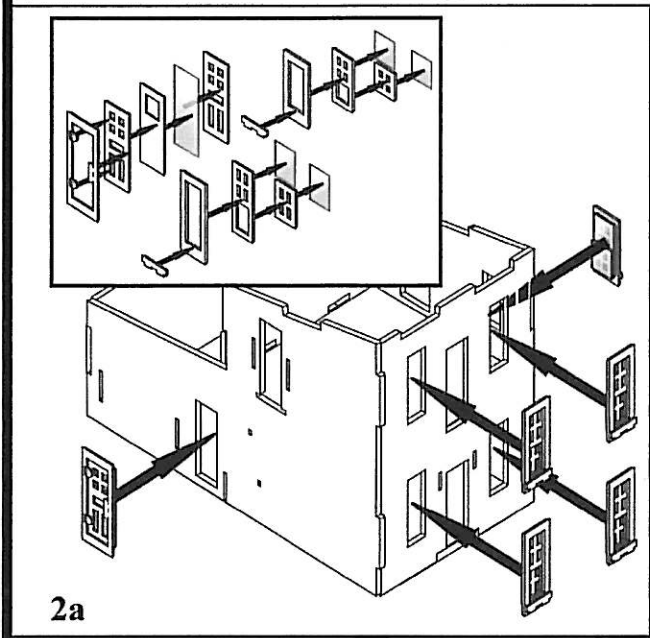

2a

Constructing the shell:

1A) Start by gluing the upper and lower flooring into the tabs on the front and back walls. Note that the flooring tabs into the bottom of the doorways.


1B) Now glue the two side walls into place, followed by the small rear wall. Now glue the inner support wall to the back of the garage door openings as shown.

Windows and doors:


2A) To assemble the windows, first remove the peel-and-stick from the lower sash and apply a section of clear window glazing to it. Now do the same with the upper sash and frame making sure to keep the edge of the glazing flush with the top edge of the frame. Now stick the lower sash into place on the frame. Note that it is possible to position the lower sash in an open position if desired. Now take the window frame and remove the peel-and-stick from it. Center the window sash assembly into the frame and press into place.

It is best to place the window assemblies into their openings as they are done. See diagram 2A for placement. The peel-and-stick on the frame will be enough to hold them into place.

Assemble the side entry door by removing the backing from the inner door panel and applying the window glazing to it. Now apply the trim panel to the inner door panel. (We have included a second trim panel that can be applied to the back of the door if you want to mount the door open). Finally, mount the outer frame section to the door, then insert the completed door into the wall opening.

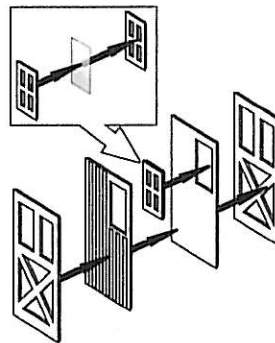

2B) Assemble the garage doors by first removing the peel-and-stick backing from the door windows and placing one on each side of the clear glazing. Mount the two scribed inner panels back to back using their peel-and-stick adhesive. Place the window into the opening and then apply the two outer door trim panels as shown.

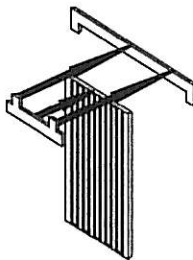

Assemble the upper sliding doors by removing the backing from the upper track and placing it on the wall above the door opening as shown. Next remove the backing from the door hanger and apply it to the top of the door. Now remove the backing from the door and place it in the desired position on the wall.