

# LASER-ART STRUCTURES by BRANCHLINE TRAINS

**Doors:**

5A) Assemble each large door by removing the backing from the outer door frame and applying it to the inner panel. The door assembly can then be pressing into the proper openings.


Assemble the two small end doors by applying the scribed section to the backing panel as shown. (Note that the backing panel is larger than the scribed panel on these doors). Apply the completed door from the inside of the structure.

The sliding door on the lower right section can now be installed. Ad the upper track section to the building followed by the door. The track section location has been scribed onto the structure above the opening.


5B) Assemble the two lower front loading doors by applying the scribed section to the backing panel as shown. (Note that the backing panel is larger than the scribed panel on these doors). These too will need to be placed into the openings from the inside the building.

**Upper roof bracing:**


6) The two upper bracing sections glue into the two slots in the upper side walls as shown. Add the top caps to them by removing the backing from them and pressing into place.

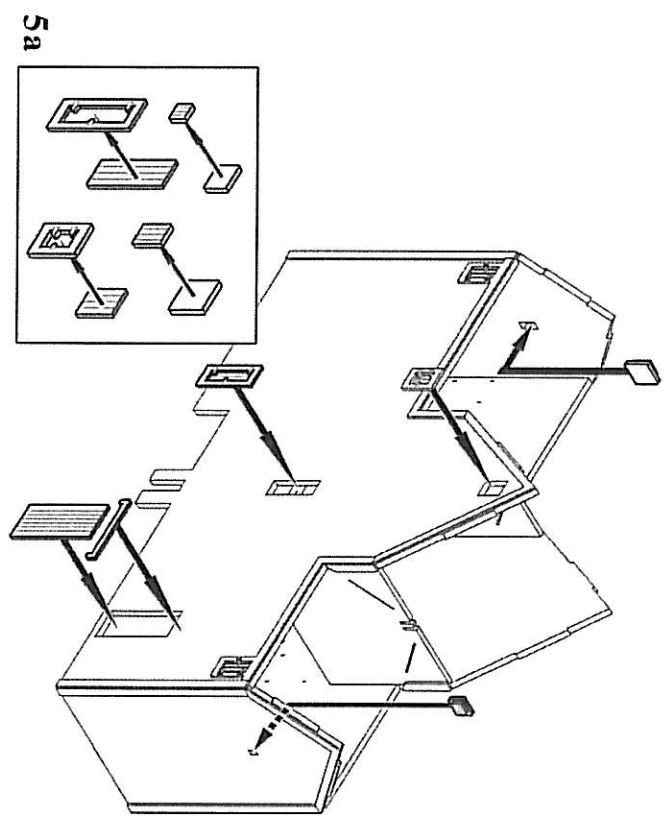

5a

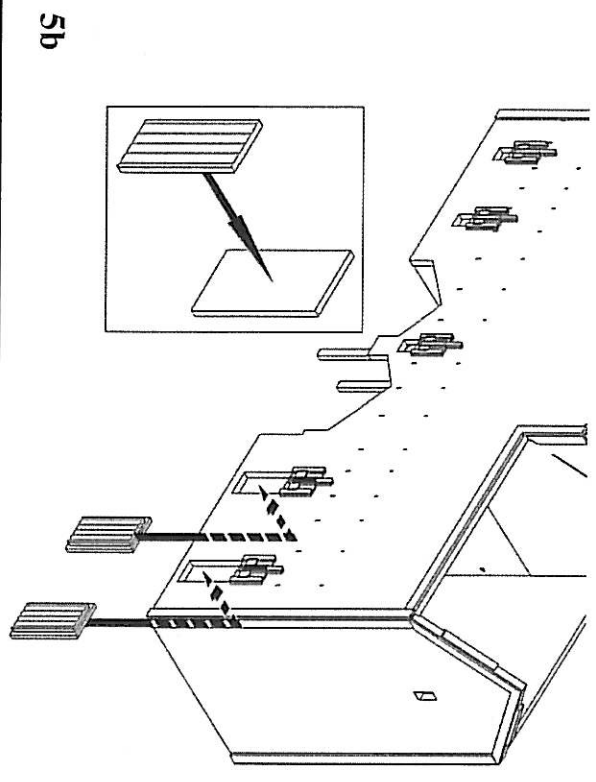

5b

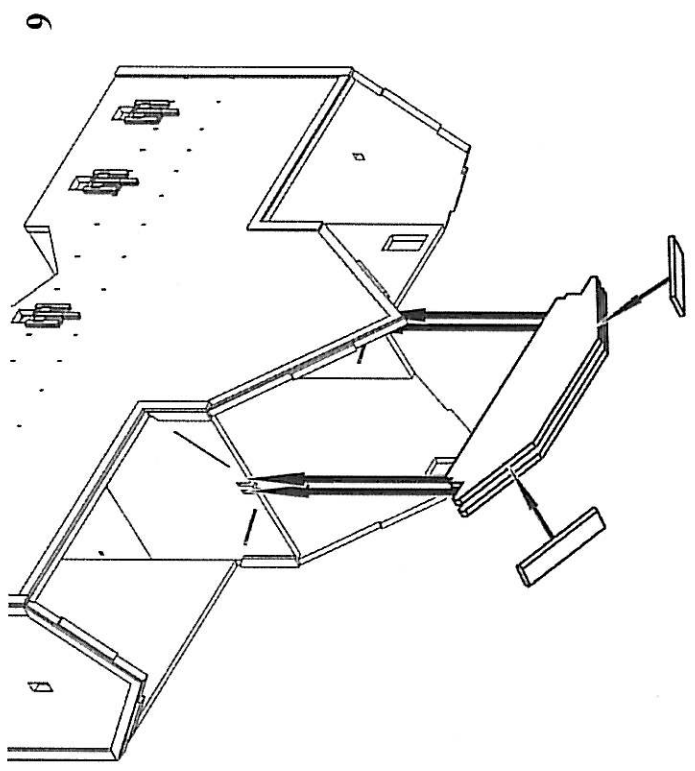

6